



AIRPAX

Power Protection Products

[HOME PAGE](#) [CONTACT US](#) [ABOUT AIRPAX](#) [AIRPAX PRODUCTS](#) [AIRPAX NEWS](#) [AIRPAX CERTIFICATIONS](#)
[AIRPAX CORPORATION HOME PAGE](#) [SALES REPRESENTATIVES](#)

PRODUCT MODEL
SELECTOR

WILL NUMBER SEARCH

CHECK STOCK

PRODUCT GUIDE

DESIGN GUIDE

**AVAILABLE FEATURES
OF THE PROTECTION**
• CATALOG LIBRARY
• APPLICATIONS
• DESIGN
CONSIDERATIONS
• CATALOG LIBRARY
• DESIGN
CONSIDERATIONS
• APPLICATIONS
• DESIGN
CONSIDERATIONS

CATALOG LIBRARY

CONTACTS & MAPS

• TERMS OF USE
• RETURN

JOIN US REGISTRATION

PRODUCT MODEL SELECTOR

Parameter Search

Part Number Search

Search Criteria

Search

Select required parameters below. Click "Search" to get links to the product that match your criteria.

Agency ² :	<input type="text"/>	Land's Style ² :	<input type="text" value="No preference"/>
Approvals ² :	<input type="text" value="UL 1500 certified"/> UL 188 listed UL 409A listed UL recognized ETI compliant CSA certified	Max. Interrupting Capacity ² :	<input type="text" value="No preference"/>
(Click & Click to download)		Poles ² :	<input type="text" value="No preference"/>
Dimensions ² :	<input type="text" value="No preference"/>	Terminal Type ² :	<input type="text" value="No preference"/>
		Max. Volts AC ² :	<input type="text" value="No preference"/>
		Max. Volts DC ² :	<input type="text" value="No preference"/>

Optionally you can enter additional keywords below to narrow your search.

Keywords ²

Figure 1

PRODUCT MODEL SELECTOR

Parameter Search

Part Number Search

Search Criteria

Search Reset

Select required parameters below. Click "Search" to get linked to the product that match your criteria.

Amps ¹ :	Handle Size ⁷ :	<input type="text" value="Standard 1000V"/>
Approvals ⁸ :	Max. Interrupting Capacity ² :	<input type="text" value="5000"/>
<input type="text" value="USA certified"/> <input type="text" value="CUR recognized"/> <input type="text" value="MIL-PRF-38019"/> <input type="text" value="MIL-PRF-38021"/> <input type="text" value="TUV approved"/> <input type="text" value="VDE approved"/>	Poles ³ :	<input type="text" value="No preference"/>
(Click OK to reset)	Terminal Type ⁴ :	<input type="text" value="No preference"/>
Dimensions ⁵ :	Max. Vrms AG ⁶ :	<input type="text" value="No preference"/>
<input type="text" value="No preference"/>	Max. Vrms DC ⁹ :	<input type="text" value="No preference"/>

Optionally you can enter additional keywords below to narrow your search:

Keywords ⁹

Figure 2

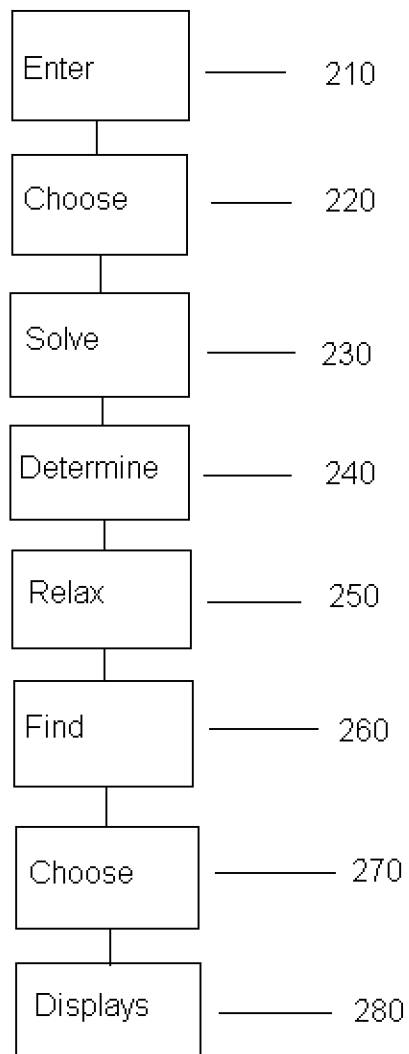


Figure 3a

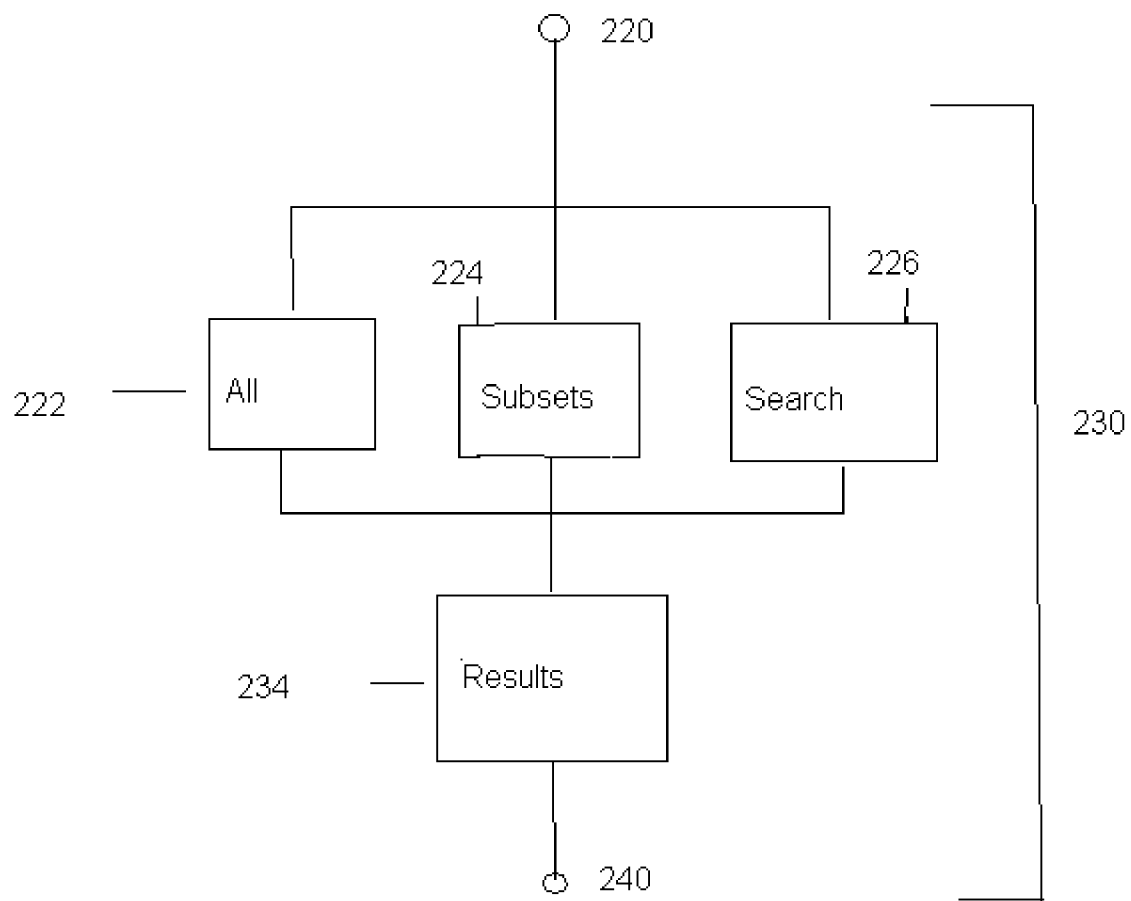


Figure 3b

Amperage ?		Handle Style ?	Eliminated Rocker ?
Approvals ? (Click OK to deselect)	JL 1500 certified JL 48L listed JL 48EA listed JL recognized CF compliant CSA certified	Max Interrupting Capacity ?	50000
Disconnector ?	No preference	OCB ?	No preference
		Terminal Type ?	No preference
		Max Volts AC ?	No preference
		Max Volts DC ?	No preference

Optimally, you can enter additional keywords below to narrow your search.

Keywords: 41 Words ▼

✎ Searching using only "Max. Incoming Capacity, Approved" produced these results. Click on the product description to link to the product configuration page.

Compare Credit Products



Airpax-type ALJL/EALC circuit breakers are available in a wide variety of configurations, including series series with auxiliary switch, shunt and relay with choice of delays and ratings in DC and/or 50/60-Hz (100-Hz versions).



Airpax type ALJL/EJL—circuit breakers are offered in a wide variety of configurations, including series series with auxiliary switch, stand alone and relay with choice. Relays and solenoids in DC and 60/50/400 Hz or 50/60 Hz versions.

Figure 4



AIRPAX

Power Protection Products

■ POWER PROTECTION PRODUCTS MAIN PAGE ■ NEWS ■ EMPLOYMENT

■ AIRPAX CORPORATION MAIN PAGE ■ SALES REPS / GISTS / TUTORIALS

PRODUCT NUMBER
SELECTOR

PART NUMBER SEARCH

CHECK STOCK ✓

PRODUCT GUIDE

DESIGN CENTER

AVAILABLE CHOICES

BY PRODUCT ITEM

■ CONSIDERATIONS

■ APPLICATIONS

■ DESIGN

■ CONSIDERATIONS

■ COMMUNICATIONS FOR

THE INTERNATIONAL

MARKET

■ BLOG/ART

CATALOG LIBRARY

CONTACT US & MAPS

■ TERMS OF USE

■ SITEMAP

LOGIN OR REGISTER

Parameter Search

Part Number Search

Search Criteria

Search | Reset |

Select required parameters below. Click "Search" to get links to the product that match your criteria.

Amcs [?]	_____	Handle Style [?]	Eliminated Rucker ▾
Approvals [?]	UL 1570 certified ▴ UL 485 listed UL 485A listed UL recognized UL compliant CSA certified ▾	Max. Interrupting Capacity [?]	50000 ▾
(CMT CMT to Sess/sec)	_____	Index [?]	No preference ▾
Dimensions [?]	-- No preference -- ▾	Terminal Type [?]	-- No preference -- ▾
		Max. Vchrs AC [?]	-- No preference -- ▾
		Max. Vchrs DC [?]	-- No preference -- ▾

Optionally you can enter additional Keywords below to narrow your search.

Keywords [?] | All Words ▾

No Results found for this search. Similar Searches found results below:

Handle Style: <i>Eliminated Rucker</i>	✓		
Approvals: <i>ULF Approval</i>	✓	✓	✓
Max. Interrupting Capacity: 50000		✓	✓
Click for Results:	1	2	13

Figure 5

Keywords [?] 4/1 Vandaag ▼

LEL4M Toggle Handle
Airpax type ALJUL/ELE circuit breakers are available in a wide variety of configurations, including series series with auxiliary switch, shunt and relay with choice of delays and ratings in DC and/or 50/60 Hz at 100 Hz versions.

LEL4M Rocker Handle
Airpax type ALJUL/ELE circuit breakers are available in a wide variety of configurations, including series series with auxiliary switch, shunt and relay with choice of delays and ratings in DC and/or 50/60 Hz at 100 Hz versions.

Figure 6